


PJ-3 双金属轴套 (CuPb24Sn)

PJ-3 Bimetal Bushing (CuPb24Sn)

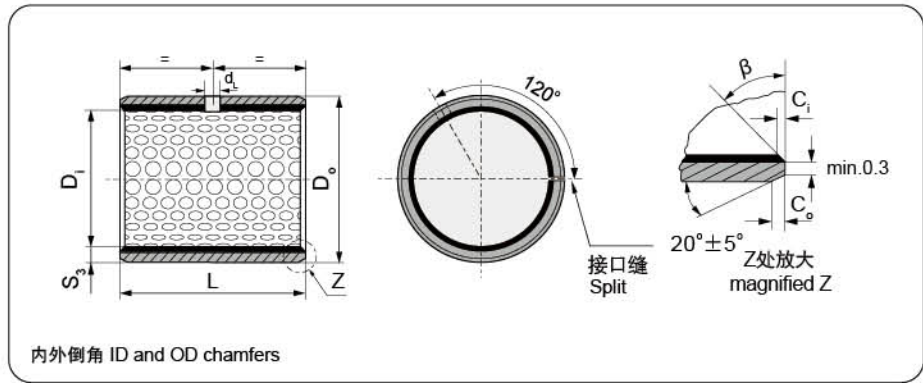

S_3	C_o	C_i	β
0.75	0.5 ± 0.3	0.25 ± 0.2	$35^\circ \pm 5^\circ$
1.00	0.6 ± 0.3	0.30 ± 0.2	$35^\circ \pm 5^\circ$
1.50	0.7 ± 0.3	0.50 ± 0.3	$35^\circ \pm 5^\circ$

S_3	C_o	C_i	β
2.00	1.2 ± 0.4	0.50 ± 0.3	$35^\circ \pm 5^\circ$
2.50	1.8 ± 0.6	0.60 ± 0.3	$45^\circ \pm 5^\circ$

单位unit:mm

内径 D _i φ d	外径 D _o φ D	轴径(h8) Shaft D _s	座孔(H7) Housing D _H	压装后 内孔公差 Arter fixed D _{i,a}	配合间隙 Clearance C _D	壁厚 Wall thickness S ₃	油孔 Oil hole d _L	长度 L ⁰ _{-0.40}							
								10	15	20	25	30	40	50	
10	12	10 _{-0.022}	12 ^{+0.018}	+0.148 +0.010	0.170 0.010	0.995 0.935	4	1010	1015	1020					
12	14	12 _{-0.027}	14 ^{+0.018}		0.175 0.010			1210	1215	1220					
14	16	14 _{-0.027}	16 ^{+0.018}					1410	1415	1420					
15	17	15 _{-0.027}	17 ^{+0.018}					1510	1515	1520					
16	18	16 _{-0.027}	18 ^{+0.018}					1610	1615	1620					
18	20	18 _{-0.027}	20 ^{+0.021}	+0.151 +0.010	0.178 0.010	1.490 1.430	6	1810	1815	1820	1825				
20	23	20 _{-0.033}	23 ^{+0.021}	+0.161 +0.020	0.194 0.020			2010	2015	2020	2025				
22	25	22 _{-0.033}	25 ^{+0.021}					2210	2215	2220	2225				
24	27	24 _{-0.033}	27 ^{+0.021}					2410	2415	2420	2425	2430			
25	28	25 _{-0.033}	28 ^{+0.021}						2515	2520	2525	2530			
26	30	26 _{-0.033}	30 ^{+0.021}	+0.181 +0.040	0.214 0.040	1.980 1.920	8		2615	2620	2625	2630			
28	32	28 _{-0.033}	32 ^{+0.025}	+0.185 +0.040	0.218 0.040				2815	2820	2825	2830	2840		
30	34	30 _{-0.033}	34 ^{+0.025}						3015	3020	3025	3030	3040		
32	36	32 _{-0.039}	36 ^{+0.025}						3215	3220	3225	3230	3240		
35	39	35 _{-0.039}	39 ^{+0.025}							3520	3525	3530	3540	3550	
38	42	38 _{-0.039}	42 ^{+0.025}	+0.185 +0.040	0.224 0.040	1.980 1.920	8			3820	3825	3830	3840	3850	
40	44	40 _{-0.039}	44 ^{+0.025}							4020	4025	4030	4040	4050	

PJ-3 双金属轴套 (CuPb24Sn)

PJ-3 Bimetal Bushing (CuPb24Sn)

内径 D _i φ d	外径 D _o φ D	轴径(h8) Shaft D _s	座孔(H7) Housing D _H	压装后 内孔公差 Arter fixed D _{i,a}	配合间隙 Clearance C _D	壁厚 Wall thickness S ₃	油孔 Oil hole d _L	长度 L ⁰ _{-0.40}								
								25	30	40	50	60	80	90	100	
45	50	45 ^{-0.039}	50 ^{+0.025}	+ 0.225 + 0.080	0.264 0.080	2.460 2.400	8	4525	4530	4540	4550					
50	55	50 ^{-0.039}	55 ^{+0.030}	+ 0.230 + 0.080	0.269 0.080				5030	5040	5050	5060				
55	60	55 ^{-0.046}	60 ^{+0.030}		0.276 0.080				5530	5540	5550	5560				
60	65	60 ^{-0.046}	65 ^{+0.030}						6030	6040	6050	6060				
65	70	65 ^{-0.046}	70 ^{+0.030}						6530	6540	6550	6560				
70	75	70 ^{-0.046}	75 ^{+0.030}						7030	7040	7050	7060	7080			
75	80	75 ^{-0.046}	80 ^{+0.030}	+ 0.235 + 0.080	0.281 0.080		9.5		7530	7540	7550	7560	7580			
80	85	80 ^{-0.046}	85 ^{+0.035}						8030	8040	8050	8060	8080	8090		
85	90	85 ^{-0.054}	90 ^{+0.035}		0.289 0.080				8530	8540	8550	8560	8580	8590	85100	
90	95	90 ^{-0.054}	95 ^{+0.035}							9040	9050	9060	9080	9090	90100	
95	100	95 ^{-0.054}	100 ^{+0.035}								9550	9560	9580	9590	95100	
100	105	100 ^{-0.054}	105 ^{+0.035}								10050	10060	10080	10090	100100	
105	110	105 ^{-0.054}	110 ^{+0.035}								10550	10560	10580	10590	105100	
110	115	110 ^{-0.054}	115 ^{+0.035}								11050	11060	11080	11090	110100	
115	120	115 ^{-0.054}	120 ^{+0.035}								11550	11560	11580	11590	115100	
120	125	120 ^{-0.054}	125 ^{+0.040}	+ 0.240 + 0.080	0.303 0.080						12050	12060	12080	12090	120100	
125	130	125 ^{-0.063}	130 ^{+0.040}									12560	12580	12590	125100	
130	135	130 ^{-0.063}	135 ^{+0.040}									13060	13080	13090	130100	
135	140	135 ^{-0.063}	140 ^{+0.040}									13560	13580	13590	135100	
140	145	140 ^{-0.063}	145 ^{+0.040}									14060	14080	14090	140100	
150	155	150 ^{-0.063}	155 ^{+0.040}										15060	15080	15090	150100